

BARCODE PRINTER

scantechTM

ST-428B

Thermal Transfer / Direct Thermal

BARCODE PRINTER



Features

- Dual-motor, side clamshell design.
- 200mm/s (8"/s) Printing Speed, make daily task more efficient;
- 300m ribbon capacity, up to 214mm (8.4")OD label capacity design;
- 8MB Flash and 8MB SRAM memory
- Compatible with TSPL/EPL/ZPL/DPL, perfect alternative for your barcode project;
- Standard USB2.0 port
- Bartender Label edit software & Windows driver available;
- LCD control panel for optional, which allows user control the printer with repeat task without computer.

Application


- Printing
- Logistics & Warehouse
- Retail Marketing
- Manufacturing



BARCODE PRINTER

Model **ST-428B**

Resolution	203 DPI
Printing method	Thermal Transfer / Direct Thermal
Max.print speed(Max.)	200mm (8") / s
Max.print width(Max.)	104 mm (4.09")
Max.print lengthMax.)	1778 mm (70")
Media winding	Front feed paper
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	25.4 ~ 115 mm
Media thickness	0.06 ~ 0.25 mm
Ribbon length	300m
Ribbon width	25.4mm-110mm (1"-4.3")
Label length	10 ~ 1778mm
Enclosure	ABS plastic
Dimension	246 mm(D) x 223 mm(W) x 204 mm(H)
Weight	2.47kg
Processor	32 bit RISC CPU
Memory	8MB FLASH memory / SRAM 8M MicroSD Flash memory expansion up to 4GB
Interface	Standard: USB 2.0/TF Card ; Optional: RS-232 / Ethernet / WIFI / Bluetooth
Power supply	Input: AC 110-240V Output: DC 24V
Control panel	3 LEDs, 4 buttons [Standard version] ; LCD screen, 4 buttons [Pro version];
Sensors type	Gap sensor Open cover sensor Black Label sensor Ribbon sensor
Internal fonts	8 alpha-numeric bitmap fonts Windows fonts are downloadable from software
Barcodes	1D bar code Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 2D bar code PDF-417, Maxicode, DataMatrix, QR code, Aztec
Font and barcode rotation	0° / 90° / 180° / 270°
Printer language	TSPL / EPL / ZPL / DPL
Environment condition	Operation temperature:5°C-40°C(41°F-104°F), Humidity (non-condensing): 25%-85% Storage : -40°C-60°C(-40°F-140°F), Humidity (non-condensing): 10%-90%
Safety regulation	FCC / CE / CCC / CB
Printout deviation	Vertical: 1 mm (Max). / Level: 1 mm (Max).
Standard accessories	①Windows labeling software , driver and user manual CD ②Quick start guide ③USB cable ④Power cord ⑤External switching power adapter ⑥Paper roller ⑦Ribbon roller ⑧Ribbon recycling paper tube ⑨Paper ⑩Ribbon ⑪External Label Case
Factory Options	①RS-232(2400-115200 bps) ②Bluetooth ③ WiFi ④Real time clock ⑤Ethernet ⑥LCD/LED(Must choose one)
Dealer options	①external roll mount (1"core) ; ②Bluetooth (RS-232C) ; ③WIFI ; ④External roll mount board ;

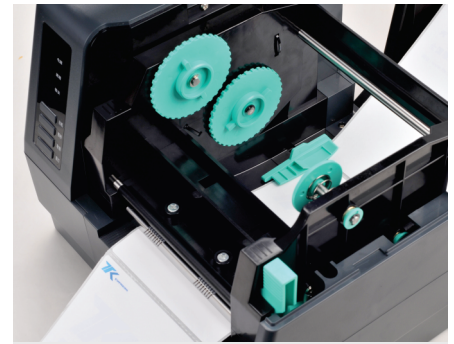

Multi-media printing

Can be used with multi-media type, including continuous, gap, fan-fold and punched hole



High Speed Printing

200mm/s (5"/s) Printing Speed, make daily task more efficient;



HD LCD Screen

LCD screen allows user set parameter to printer without computer visibly and conveniently

IMPORTED AND MARKETED BY

Scantech

05-004/014/T6, Kavya Residency,
Ranga Nagar Colony, Chinthal, Hyderabad - 500037.
email : sales@scantech.co.in, www.scantech.co.in,
Skype : scantech9

